

Absolute Encoders - Singleturn

Standard
SIL2/PLd, optical


Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)

SSI/BiSS + SinCos



The absolute singleturn encoders 5853FS2 and 5873FS2 of the Sendix SIL family are suited for use in safety-related applications up to SIL2 according to EN 61800-5-2 or PLd to EN ISO 13849-1.

The extra strong Safety-Lock™ Design interlocked bearings, the high integration density of the components based on OptoASIC technology and the rugged die-cast housing make these devices ideal also for demanding applications outdoors up to IP65.

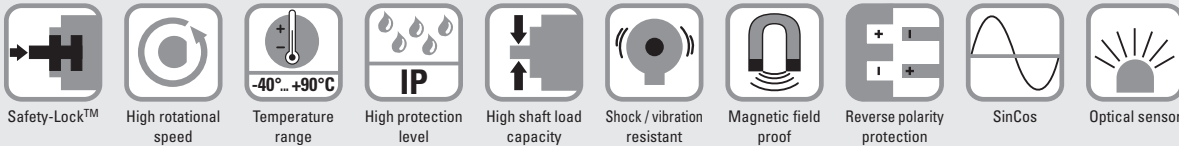

Functional Safety

- Encoder with individual certificate from IFA / TÜV.
- Suitable for applications up to SIL2 acc. to EN 61800-5-2.
- Suitable for applications up to PLd acc. to EN ISO 13849-1.
- SSI or BiSS interface with incremental SinCos tracks with 2048 ppr.
- Certified mechanical mounting + electronic.

Flexible

- Shaft and hollow shaft versions.
- Cable and connector variants.
- Various mounting options available.

Order code
Shaft version

8.5853FS2 . 1 X X X . X X 2 X
Type a b c d e f g h

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

1 = clamping flange, IP65, ø 58 mm [2.28"]

b Shaft (ø x L)

2 = 10 x 20 mm [0.39 x 0.79"], with flat

A = 10 x 20 mm [0.39 x 0.79"] , with feather key

c Interface / Power supply

3 = SSI or BiSS + 2048 ppr SinCos / 5 V DC

4 = SSI or BiSS + 2048 ppr SinCos / 10 ... 30 V DC

d Type of connection

1 = axial cable, 1 m [3.28'] PVC

2 = radial cable, 1 m [3.28'] PVC

3 = M23 connector, 12 pin, axial

4 = M23 connector, 12 pin, radial

e Code

B = SSI, Binary

C = BiSS, Binary

G = SSI, Gray

f Resolution ¹⁾

A = 10 bit ST

1 = 11 bit ST

2 = 12 bit ST

3 = 13 bit ST

4 = 14 bit ST

7 = 17 bit ST

g Input/output ¹⁾

2 = SET, DIR input

h Options (Service)

1 = no option

2 = Status LED

3 = SET button and status LED

optional on request

- special cable length

- Ex 2/22

Order code
Hollow shaft

8.5873FS2 . X X X X . X X 2 X
Type a b c d e f g h

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

9 = with torque stop, flexible, IP65

A = with torque stop set, rigid, IP65

B = with stator coupling, IP65, ø 63 mm [2.48"]

b Hollow shaft

3 = ø 10 mm [0.39"]

4 = ø 12 mm [0.47"]

5 = ø 14 mm [0.55"]

K = ø 10 mm [0.39"] , tapered shaft

c Interface / Power supply

3 = SSI or BiSS + 2048 ppr SinCos / 5 V DC

4 = SSI or BiSS + 2048 ppr SinCos / 10 ... 30 V DC

d Type of connection

2 = radial cable, 1 m [3.28'] PVC

E = tangential cable, 1 m [3.28'] PVC

4 = M23 connector, 12 pin, radial

e Code

B = SSI, Binary

C = BiSS, Binary

G = SSI, Gray

f Resolution ¹⁾

A = 10 bit ST

1 = 11 bit ST

2 = 12 bit ST

3 = 13 bit ST

4 = 14 bit ST

7 = 17 bit ST

g Input/output ¹⁾

2 = SET, DIR input

h Options (Service)

1 = no option

2 = Status LED

3 = SET button and status LED

optional on request

- special cable length

- Ex 2/22

1) Resolution, preset value and count direction are factory-programmable.

Absolute Encoders - Singleturn

Standard SIL2/PLd, optical	Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)	SSI/BiSS + SinCos
Accessory		Order No.
EMC shield terminal	For top-hat rail mounting	8.0000.4G06.0000
Screw retention	Loctite 243, 5 ml	8.0000.4G05.0000
Bellows coupling, safety-oriented	You will find an overview of our couplings for Sendix SIL shaft encoders in the accessories section or under www.kuebler.com/accessories .	
Safety modules Safety-M compact / modular	You will find an overview of our systems and components for Functional Safety and the corresponding software in the safety technology section or under www.kuebler.com/safety .	
LED SSI display 570 / 575	Electronic position display up to 32 bit. You will find an overview in the accessories section or under www.kuebler.com/position_display .	
Connection technology		Order No.
Cordset, pre-assembled	M23 female connector with coupling nut, 2 m [6.56'] PVC cable ¹⁾	8.0000.6901.0002.0031
	M23 female connector with coupling nut, 10 m [32.81'] PVC cable ¹⁾	8.0000.6901.0010.0031
Connector, self-assembly (straight)	M23 female connector with coupling nut	8.0000.5012.0000
	M23 female connector with coupling nut, Ex zone 2/22	8.0000.5012.0000.Ex

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Notes regarding "Functional Safety"	
These encoders are suitable for use in safety-related systems up to SIL2 acc. to EN 61800-5-2 and PLd to EN ISO 13849-1 in conjunction with controllers or evaluation units, which possess the necessary functionality.	
Additional functions can be found in the operating manual.	

Safety characteristics	
Classification	PLd / SIL2
System structure	2 channel (Cat. 3 / HFT = 1)
PFH_d value ²⁾	2.16 x 10 ⁻⁸ h ⁻¹
Proof-test interval	20 years
Relevant standards	EN ISO 13849-1:2008; EN ISO 13849-2:2013; EN 61800-5-2:2007

Electrical characteristics	
Power supply	5 V DC ±5 % or 10 ... 30 V DC
Current consumption (no load)	5 V DC max. 70 mA 10 ... 30 V DC max. 45 mA
Reverse polarity protection of the power supply (+V)	yes
Short circuit proof outputs	yes ⁴⁾
UL approval	File 224618
CE compliant acc. to	EMC guideline 2004/108/EC Machinery directive 2006/42/EC
RoHS compliant acc. to	guideline 2011/65/EU

EMC	
Relevant standards	EN 55011 Class B :2009 / A1:2010 EN 61000-6-3 :2007 / A1:2011 EN 61000-6-2 :2005

Mechanical characteristics		
Max. speed, shaft version	up to 70°C [158°F]	12 000 min ⁻¹ , 10 000 min ⁻¹ (continuous)
	up to T _{max}	8 000 min ⁻¹ , 5 000 min ⁻¹ (continuous)
Max. speed, hollow shaft version	up to 70°C [158°F]	9 000 min ⁻¹ , 6 000 min ⁻¹ (continuous)
	up to T _{max}	6 000 min ⁻¹ , 3 000 min ⁻¹ (continuous)
Starting torque - at 20°C [68°F]	shaft version	< 0.01 Nm
	hollow shaft version	< 0.03 Nm
Moment of inertia	shaft version	4.0 x 10 ⁻⁶ kgm ²
	hollow shaft version	7.0 x 10 ⁻⁶ kgm ²
Insertion depth for shaft	hollow shaft version	min. 34 mm [1.34"]
Load capacity of shaft	radial	80 N
	axial	40 N
Weight	approx. 0.45 kg [15.87 oz]	
Protection acc. to EN 60529	IP65	
EX approval for hazardous areas	optional zone 2 and 22	
Working temperature range	-40°C ... +90°C ³⁾ [-40°F ... +194°F] ³⁾	
Material	shaft / hollow shaft	stainless steel
	flange	aluminium
	housing	zinc die-cast housing
	cable	PVC
Shock resistance acc. EN 60068-2-27	500 m/s ² , 11 ms	
Vibration resistance acc. EN 60068-2-6	200 m/s ² , 10 ... 150 Hz	

- 1) Other lengths available.
- 2) The specified value is based on a diagnostic coverage of 90 %, that must be achieved with an encoder evaluation unit.
The encoder evaluation unit must meet at least the requirements for SIL2.
- 3) Cable version: -30°C ... +90°C [-22°F ... +194°F].
- 4) Short circuit to 0 V or to output, one channel at a time, power supply correctly applied.

Absolute Encoders - Singleturn

Standard SIL2/PLd, optical	Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)	SSI/BiSS + SinCos
---------------------------------------	--	--------------------------

SSI interface	
Output driver	RS485 transceiver type
Permissible load / channel	max. 20 mA
Signal level	HIGH typ 3.8 V LOW at $I_{load} = 20\text{ mA}$ typ 1.3 V
Singleturn resolution	10 ... 14 bit and 17 bit ¹⁾
Code	Binary or gray
SSI clock rate	50 kHz ... 2 MHz
Monoflop time	≤ 15 μs
Note: If the clock starts cycling within the monoflop time, a second data transfer starts with the same data. If the clock starts cycling after the monoflop time, the data transfer starts with the new values. The update rate is dependent on the clock speed, data length and monoflop-time.	
Data refresh rate	resolution ≤ 14 bit ≤ 1 μs resolution ≥ 15 bit 4 μs
Status and parity bit	on request

BiSS interface	
Resolution singleturn	10 ... 14 bit and 17 bit ¹⁾
Code	Binary
Clock rate	up to 10 MHz
Max. update rate	< 10 μs, depends on the clock rate and the data length
Data refresh rate	≤ 1 μs
Note:	<ul style="list-style-type: none"> - Bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings - CRC data verification

SinCos interface	
Max. frequency -3dB	400 kHz
Signal level	1 V _{pp} (±10 %)
Short circuit proof	yes
Pulse rate	2048 ppr

SET input or SET button	
Input	active HIGH
Input type	comparator
Signal level	HIGH min: 60 % of +V, max: +V LOW max: 25 % of +V (Power supply)
Input current	< 0.5 mA
Min. pulse duration (SET)	10 ms
Timeout after SET signal	14 ms
Reaction time (DIR input)	1 ms
The encoder can be set to zero at any position by means of a HIGH signal on the SET input or by pressing the optional SET button (with a pencil, ball-point pen or similar). Other preset values can be factory-programmed. The SET input has a signal delay time of approx. 1 ms. Once the SET function has been triggered, the encoder requires an internal processing time of approx. 15 ms before the new position data can be read. During this time the LED is ON.	

DIR input	
A HIGH signal switches the direction of rotation from the default CW to CCW. This function can also be factory-programmed to be inverted. If DIR is changed when the device is already switched on, then this will be interpreted as an error. The LED will come ON and the status output will switch to LOW.	

Power-on delay	
After Power-ON the encoder requires a time of approx. 150 ms before valid data can be read.	

LED	
The optional LED (red) serves to display various alarm or error messages. In normal operation the LED is OFF.	
If the LED is ON (status output LOW) this indicates: <ul style="list-style-type: none"> - Sensor error, singleturn or multiturn (soiling, glass breakage etc.) - LED error, failure or ageing - Over- or under-temperature 	
In the SSI mode, the fault indication can only be reset by switching off the power supply to the device.	


Terminal assignment

Interface	Type of connection	Cable (isolate unused wires individually before initial start-up)														
		Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	A	\bar{A}	B	\bar{B}	\perp	
3, 4	1, 2, E	Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	BK	VT	GY-PK	RD-BU	shield	

Interface	Type of connection	M23 connector, 12-pin														
		Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	A	\bar{A}	B	\bar{B}	\perp	
3, 4	3, 4	Pin:	1	2	3	4	5	6	7	8	9	10	11	12	PH	

- +V: Encoder power supply +V DC
- 0 V: Encoder power supply ground GND (0 V)
- C+, C-: Clock signal
- D+, D-: Data signal
- SET: Set input. The current position becomes defined as position zero.
- DIR: Direction input: If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.
- A, \bar{A} : cosine signal
- B, \bar{B} : sine signal
- PH \perp : Plug connector housing (shield)

Top view of mating side, male contact base



M23 connector, 12-pin

1) Other options on request.

Absolute Encoders - Singleturn


Standard SIL2/PLd, optical	Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)	SSI/BiSS + SinCos
---------------------------------------	--	--------------------------

Dimensions shaft version

Dimensions in mm [inch]


Clamping flange, \varnothing 58 [2.28] Flange type 1 with shaft type 2 (Drawing with cable)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- D = 10 ^{h7} [0.39]

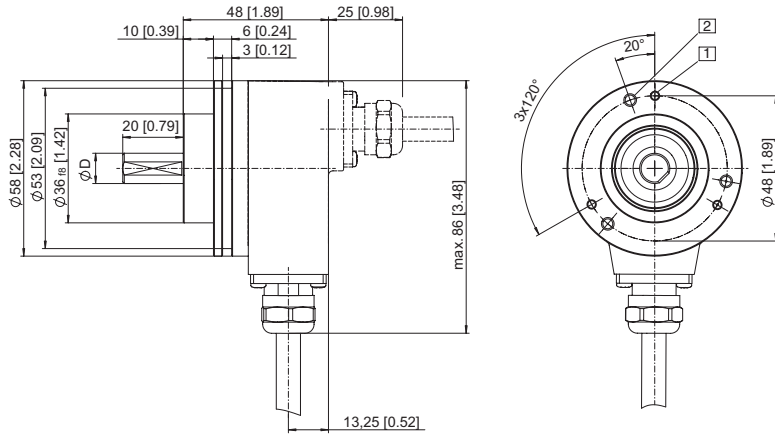

Clamping flange, \varnothing 58 [2.28] Flange type 1 with shaft type A (Drawing with M23 connector)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep
- 3 Feather key DIN 6885 - A - 3x3x6
- D = 10 ^{h7} [0.39]

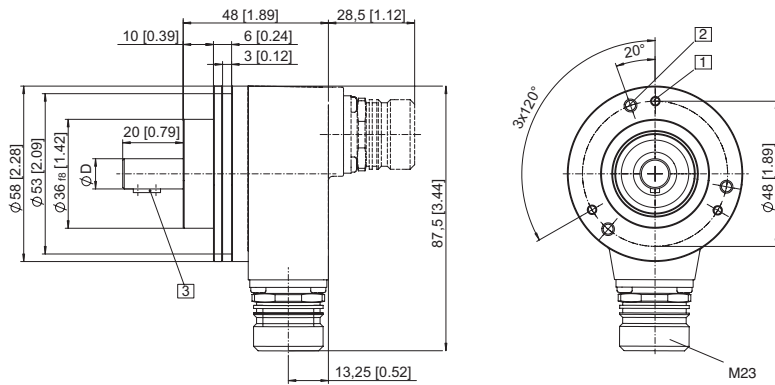

Absolute Encoders
Singleturn

Absolute Encoders - Singleturn

Standard
SIL2/PLd, optical

Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)

SSI/BiSS + SinCos

Dimensions hollow shaft version

Dimensions in mm [inch]



Flange with torque stop set, rigid

Flange type A


(Drawing with cable)

- 1 SW 3, recommended torque for the clamping ring 2.5 Nm

D = \varnothing 10^{H7} [0.39]
 \varnothing 12^{H7} [0.47]
 \varnothing 14^{H7} [0.55]

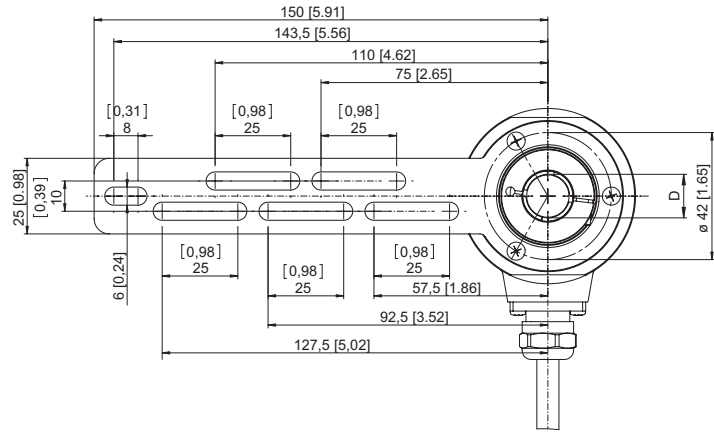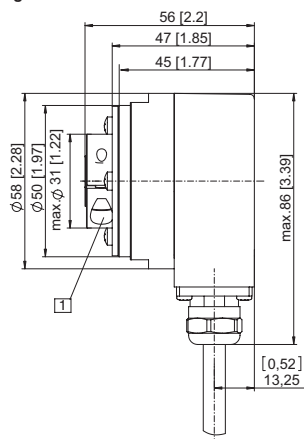

Torque pin with rectangular sleeve with M4 thread





Flange with torque stop, flexible

Flange type 9

(Drawing with M23 connector)

- 1 recommended torque for the clamping ring 2.5 Nm

D = \varnothing 10^{H7} [0.39]
 \varnothing 12^{H7} [0.47]
 \varnothing 14^{H7} [0.55]

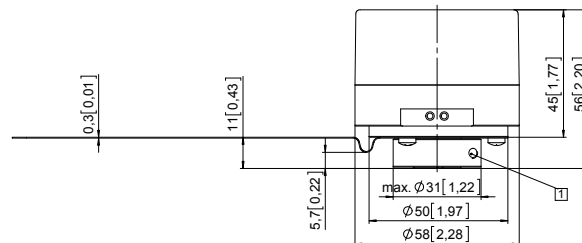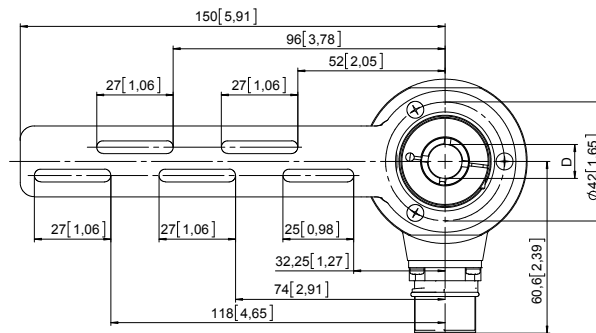

Absolute Encoders - Singleturn

Standard SIL2/PLd, optical	Sendix SIL 5853FS2 / 5873FS2 (Shaft / Hollow shaft)	SSI/BiSS + SinCos
---------------------------------------	--	--------------------------

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with stator coupling, \varnothing 63 [2.48]

and hollow shaft

Flange type B

(Drawing with M23 connector)


- 1 SW 3, recommended torque for the clamping ring 2.5 Nm

- 2 for (4x) M3 screw

$D = \varnothing 10^{H7} [0.39]$

$\varnothing 12^{H7} [0.47]$

$\varnothing 14^{H7} [0.55]$

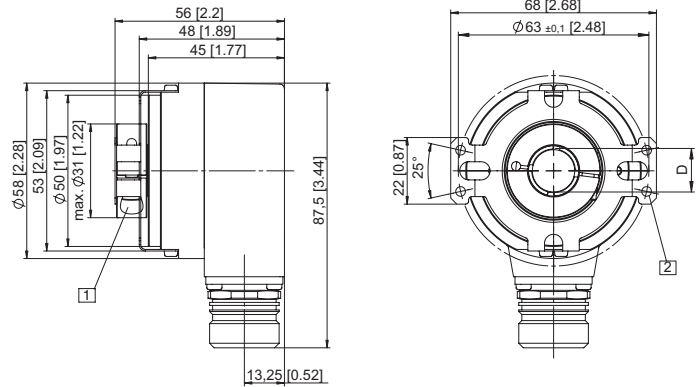

Flange with stator coupling, \varnothing 63 [2.48]

and tapered shaft

Flange type B

(Drawing with tangential cable outlet)

- 1 for (4x) M3 screw

- 2 Status LED

- 3 SET button

- 4 SW 4

